ASPHALT PAVEMENT RESTORATION DETAIL

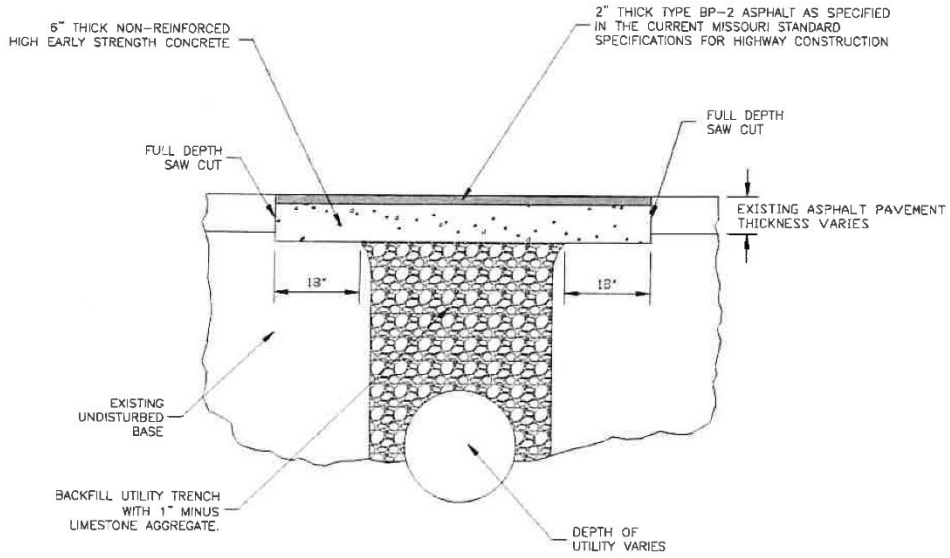

SPECIFICATIONS:

1. Contractor shall notify the City 24 hours in advance of the work for inspection.
2. Backfill for the utility trench shall be 1" minus limestone aggregate and shall be compacted to 90% of the Modified Proctor.
3. After completing the utility work, the Contractor shall make a full depth saw cut 18" beyond the limits of the trench, or as directed by the City, remove the existing pavement and base to a depth of 9 inches, and replace the excavated area with 6 inches of 8 sack, high-early concrete, attaining 3,500 psi in 24 hours.
4. After concrete sets, 2" thick type BP-2 asphalt shall be placed. Both air and surface temperatures shall be above 40 degrees F during paving operations. Minimum temperature for asphalt during paving shall be 225 degrees F.
5. Contractor will be required to barricade the area with flashing barricades and necessary signage to ensure public safety as approved by the City.