405 Attachment 13

CONCRETE PAVEMENT RESTORATION DETAIL

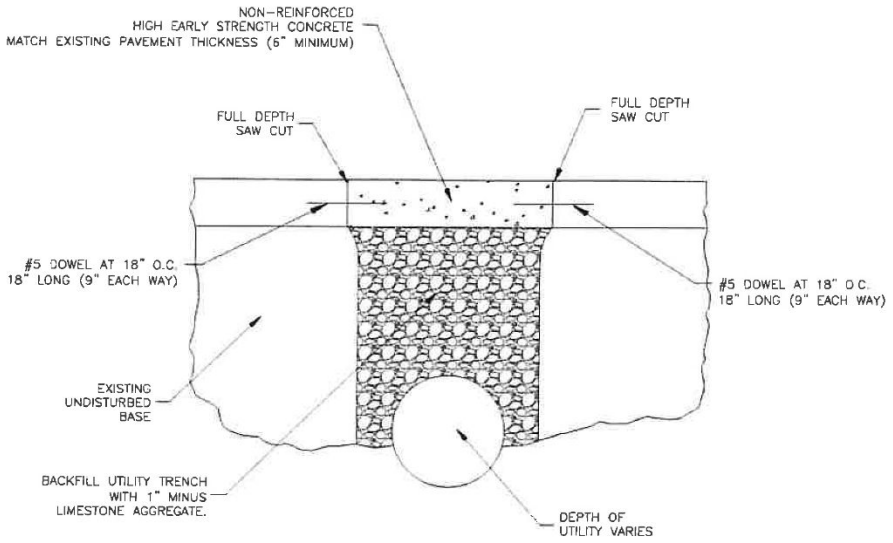

SPECIFICATIONS:

1. Contractor shall notify the City 24 hours in advance of the work for inspection.
2. Backfill for the utility trench shall be 1" minus limestone aggregate and shall be compacted to 90% of the Modified Proctor.
3. After completing the utility work, the Contractor shall make a full depth saw cut beyond the limits of the trench, as directed by the City, remove the existing pavement and base as necessary, and replace the excavated area with 8 sack, high-early concrete, attaining 3,500 psi in 24 hours. Thickness to match existing (6" minimum)
4. Contractor will be required to barricade the area with flashing barricades and necessary signage to ensure public safety as approved by the City.