


# ZONING

## 450 Attachment 3

### Township of Lower Towamensing

**Figure 1: Part 77 Surface Areas**

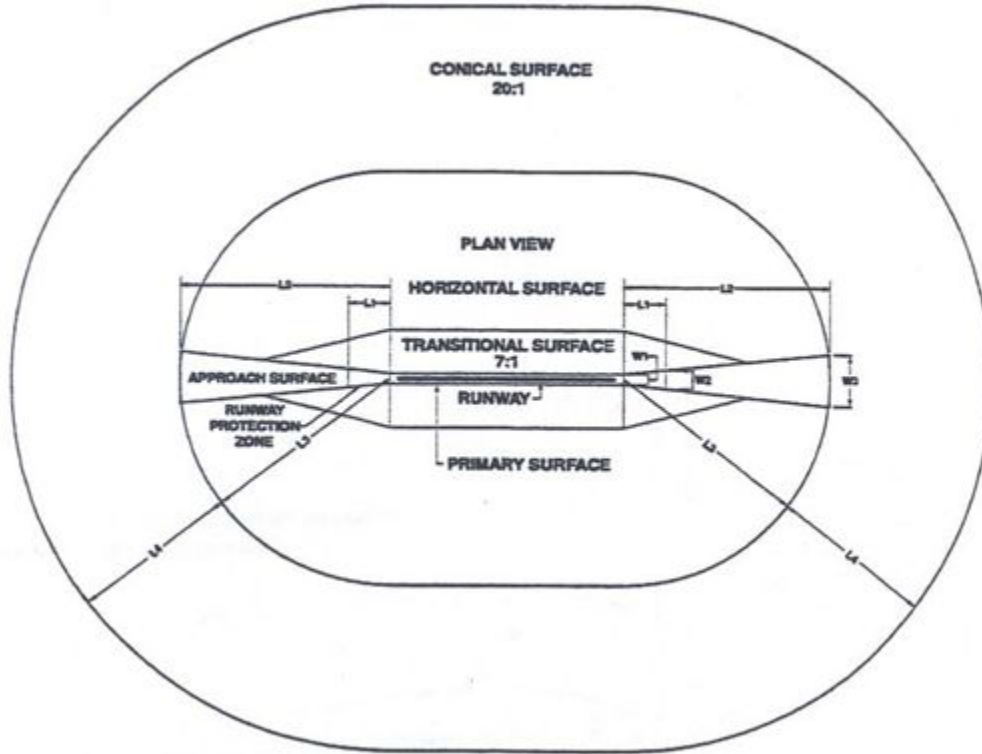

**FAR Part 77 "Imaginary Surfaces" Dimension<sup>1</sup> Requirements**

Runway Type	Runway End		Conical Surface (L4)	Horizontal Surface (L3)	Approach Surface			Approach Slope	Primary Surface Width	Transitional Surface
	Approach	Other			Length (L2)	Inner Width (W1)	Other Width (W3)			
Small Airplane <sup>2</sup>	V	V	4,000	5,000	5,000	250	1,250	20:1	250	7:1
		NP	4,000	5,000	5,000	500	1,250	20:1	500	7:1
		NP 3/4	4,000	5,000	5,000	1,000	1,250	20:1	1,000	7:1
		P	4,000	5,000	5,000	1,000	1,250	20:1	1,000	7:1
		P	4,000	5,000	5,000	1,000	1,250	20:1	1,000	7:1
	NP	V	4,000	5,000	5,000	500	2,000	20:1	500	7:1
Large Airplane <sup>3</sup>	V	V	4,000	5,000	5,000	500	1,500	20:1	500	7:1
		NP	4,000	10,000	5,000	500	1,500	20:1	500	7:1
		NP 3/4	4,000	10,000	5,000	1,000	1,500	20:1	1,000	7:1
		P	4,000	10,000	5,000	1,000	1,500	20:1	1,000	7:1
		P	4,000	10,000	5,000	1,000	1,500	20:1	1,000	7:1
	NP	V	4,000	10,000	10,000	500	3,500	34:1	500	7:1
		NP	4,000	10,000	10,000	500	3,500	34:1	500	7:1
		NP 3/4	4,000	10,000	10,000	1,000	3,500	34:1	1,000	7:1
		P	4,000	10,000	10,000	1,000	3,500	34:1	1,000	7:1
		P	4,000	10,000	10,000	1,000	3,500	34:1	1,000	7:1
Large and Small Airplanes	NP 3/4	V	4,000	10,000	10,000	1,000	4,000	34:1	1,000	7:1
		NP	4,000	10,000	10,000	1,000	4,000	34:1	1,000	7:1
		NP 3/4	4,000	10,000	10,000	1,000	4,000	34:1	1,000	7:1
		P	4,000	10,000	10,000	1,000	4,000	34:1	1,000	7:1
	P	V	4,000	10,000	10,000/40,000	1,000	4,000/16,000	50:1/40:1	1,000	7:1
		NP	4,000	10,000	10,000/40,000	1,000	4,000/16,000	50:1/40:1	1,000	7:1
		NP 3/4	4,000	10,000	10,000/40,000	1,000	4,000/16,000	50:1/40:1	1,000	7:1
P	P	4,000	10,000	10,000/40,000	1,000	4,000/16,000	50:1/40:1	1,000	7:1	

1 - In feet

2 - Less than 12,500 pounds maximum certified takeoff weight.

3 - Greater than 12,500 pounds maximum certified takeoff weight

V = Vertical approach 20:1

NP = Nonprecision approach 34:1


NP 3/4 = Nonprecision approach with visibility minimums as low as 3/4 statute miles 34:1

P = Precision approach 50:1

NOTE: L1 is the length of the RPZ and W2 is the outer width of the RPZ as defined by approach visibility minimums.


Source: Federal Aviation Administration

Figure 2: Graphical Depiction

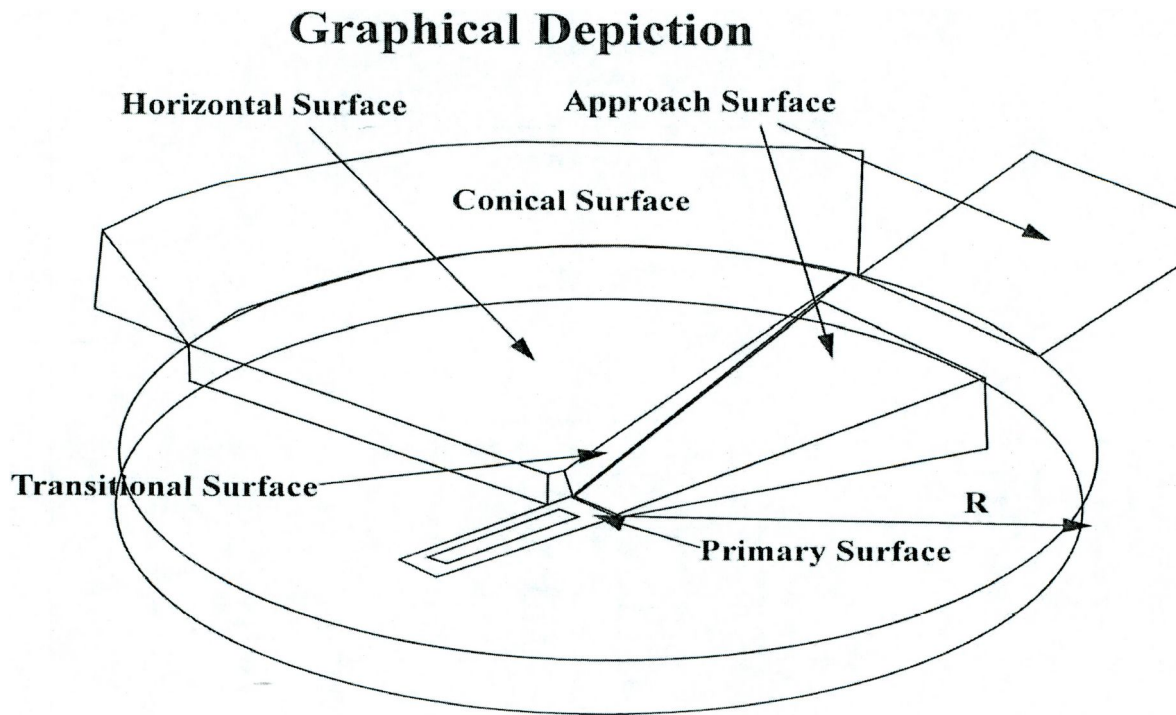

ZONING

Figure 3: Airport Elevation Map

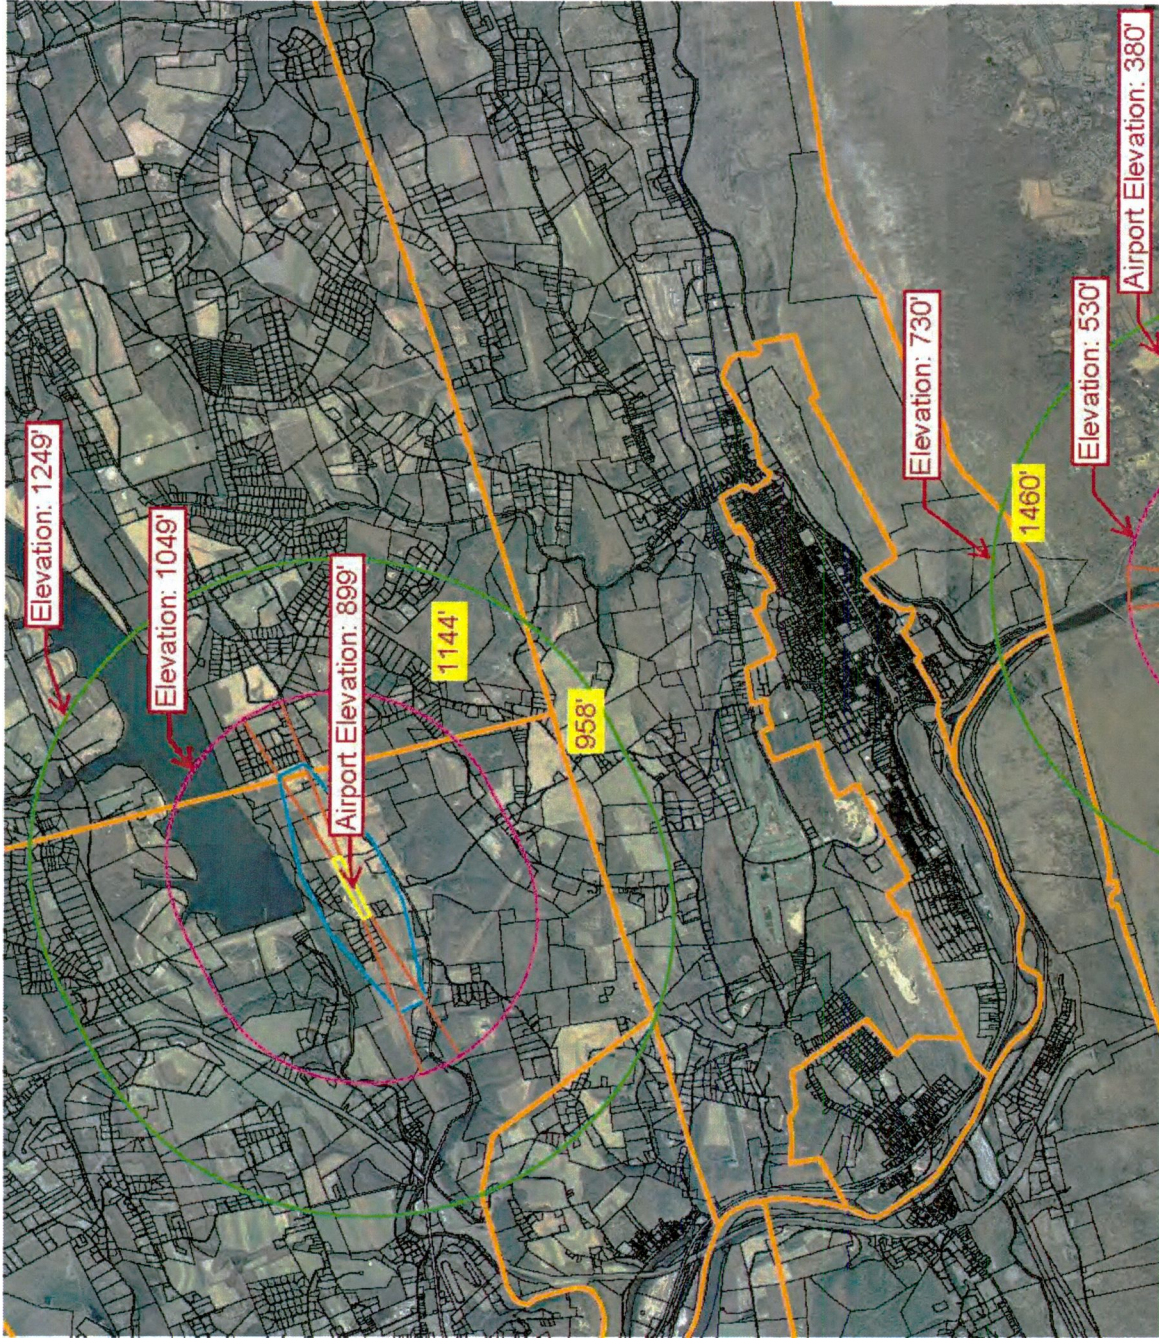

LOWER TOWAMENSING CODE

Figure 4: Airport Surface Areas Map

