


LAND USE

20 Attachment 4

Figure 20.48(a)

Parking Minimum Design Requirements

Parking Angle	Standards			
	Minimum Stall Width	Minimum Stall Depth	Minimum Aisle Width	
			One-way	Two-way
0°	22'0"	8'0"	10'0"	18'0"
30°	8'6"	17'0"	12'0"	20'0"
45°	8'6"	17'4"	12'3"	20'0"
50°	8'6"	18'0"	12'9"	20'0"
55°	8'6"	18'6"	13'3"	20'0"
60°	8'6"	18'10"	14'4"	20'0"
65°	8'6"	19'0"	15'2"	21'0"
70°	8'6"	19'2"	16'0"	21'6"
75°	8'6"	19'0"	17'6"	22'0"
90°	8'6"	17'11"	22'6"	22'6"
<b>A</b>	<b>B</b>	<b>C</b>	<b>D</b>	<b>D</b>

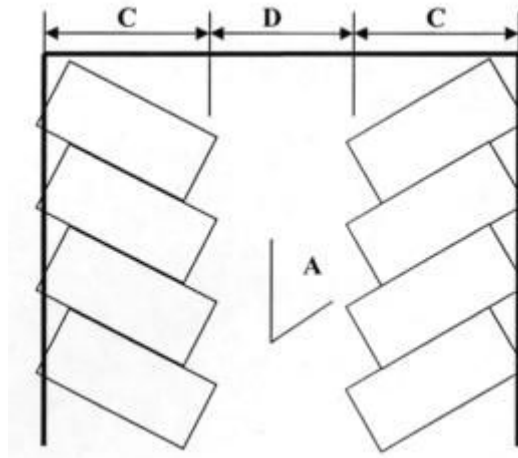

(Ord. 5513 §3 (Exh. B), 2025; Ord. 5301 §3 (Exh. B) (part), 2016; Ord. 4950 §8 (Exh. A) (part), 2005)