350 Attachment 4

City of Washington

Figure 1: Part 77 Surface Areas

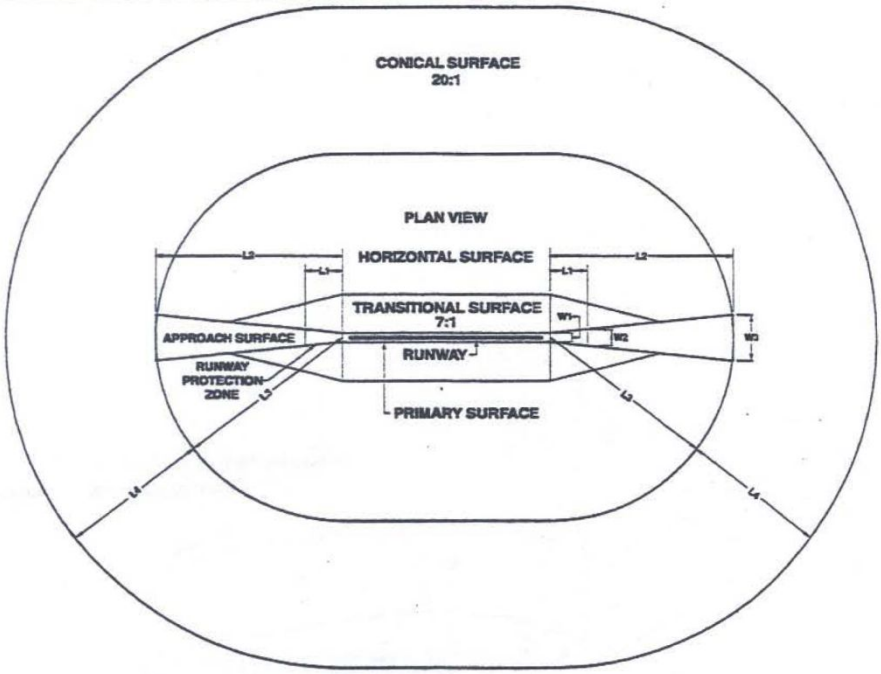

FAR PART 77 "IMAGINARY SURFACES" DIMENSION[1] REQUIREMENTS

Runway Type	Runway End: Approach	Runway End: Other	Conical Surface (L4)	Horizontal Surface (L3)	Approach Surface: Length (L2)	Approach Surface: Inner Width (W1)	Approach Surface: Other Width (W3)	Approach Slope	Primary Surface Width	Transitional Surface
Small Airplanes[2]	V	V	4,000	5,000	5,000	250	1,250	20:1	250	7:1
		NP	4,000	5,000	5,000	500	1,250	20:1	500	7:1
		NP 3/4	4,000	5,000	5,000	1,000	1,250	20:1	1,000	7:1
		P	4,000	5,000	5,000	1,000	1,250	20:1	1,000	7:1
	NP	V	4,000	5,000	5,000	500	2,000	20:1	500	7:1
		NP	4,000	5,000	5,000	500	2,000	20:1	500	7:1
		NP 3/4	4,000	5,000	5,000	1,000	2,000	20:1	1,000	7:1
		P	4,000	5,000	5,000	1,000	2,000	20:1	1,000	7:1
Large Airplanes[3]	V	V	4,000	5,000	5,000	500	1,500	20:1	500	7:1
		NP	4,000	10,000	5,000	500	1,500	20:1	500	7:1
		NP 3/4	4,000	10,000	5,000	1,000	1,500	20:1	1,000	7:1
		P	4,000	10,000	5,000	1,000	1,500	20:1	1,000	7:1
	NP	V	4,000	10,000	10,000	500	3,500	34:1	500	7:1
		NP	4,000	10,000	10,000	500	3,500	34:1	500	7:1
		NP 3/4	4,000	10,000	10,000	1,000	3,500	34:1	1,000	7:1
		P	4,000	10,000	10,000	1,000	3,500	34:1	1,000	7:1
Large and Small Airplanes	NP 3/4	V	4,000	10,000	10,000	1,000	4,000	34:1	1,000	7:1
		NP	4,000	10,000	10,000	1,000	4,000	34:1	1,000	7:1
		NP 3/4	4,000	10,000	10,000	1,000	4,000	34:1	1,000	7:1
		P	4,000	10,000	10,000	1,000	4,000	34:1	1,000	7:1
	P	V	4,000	10,000	10,000/40,000	1,000	4,000/16,000	50:1/40:1	1,000	7:1
		NP	4,000	10,000	10,000/40,000	1,000	4,000/16,000	50:1/40:1	1,000	7:1
		NP 3/4	4,000	10,000	10,000/40,000	1,000	4,000/16,000	50:1/40:1	1,000	7:1
		P	4,000	10,000	10,000/40,000	1,000	4,000/16,000	50:1/40:1	1,000	7:1

1 - In Feet
2 - Less than 12,500 lbs maximum certified takeoff weight
3 - Greater than 12,500 lbs maximum certified takeoff weight

V = Visual approach 20:1
NP = Nonprecision approach 34:1
NP 3/4 = Nonprecision approach with visibility minimums as low as 3/4 statute miles 34:1
P= Precision approach 50:1

Note: L1 is the length of the RPZ and W2 is the outer width of the RPZ as defined by approach visibility minimums

Source: Federal Aviation Administration

Pennsylvania Land Use Compatibility Guidelines

FAR PART 77 SURFACES AND DIMENSION REQUIREMENTS

Exhibit 3